



EN 61000-4-3 (1998) Electromagnetic Susceptibility TEST REPORT

Applicant: Advanced Fiber Solutions
45 Franklin Street
Milton, MA 02186

Equipment Under Test: Product: UOR-200 Series

Model: UOR-200

Test Location: Marlboro Test Labs
257 Simarano Drive
Marlboro, MA 01752-1298

Test Date: October 24, 2005

This report contains the results of an investigation of the product tested. This report may only be used to document the EN61000-4-3 testing herein and may only be reproduced in full. Any distribution of the information contained in this report requires prior approval from Advanced Fiber Solutions.

Tested & Reviewed By:



G. Abboud
Test Engineer

Reviewed By:



Charles Nasser

TABLE OF CONTENTS

	SECTION
OVERVIEW	1.0
PRODUCT IDENTIFICATION	2.0
TEST DESCRIPTION	3.0
TEST RESULTS	4.0
TEST DATA	5.0
TEST EQUIPMENT	6.0
FIGURES	7.0
PHOTOGRAPHS	8.0

1.0 OVERVIEW

This report has been compiled to document the RF Radiated Immunity test parameters, effects and results of the Advanced Fiber Solutions UOR-200, in comparison to the requirements for equipment, as specified in the following documents:

89/336/EEC (3 May 1989) Official Journal of the European Communities
Council Directive on Electromagnetic Compatibility

92/31/EEC (28 April 1992) Official Journal of the European Communities
Amending Directive 89/336/EEC on:
Council Directive on Electromagnetic Compatibility

EN61326 (1998) Electrical equipment for measurement, control and
laboratory use EMC requirements

EN61000-4-3 (2002) Electromagnetic compatibility (EMC)
Part 4: Testing and measurement techniques -
Section 3: Radiated, radio frequency, electromagnetic field
immunity test

2.0 PRODUCT IDENTIFICATION

Equipment Under Test: Advanced Fiber Solutions UOR-200

Type: The UOR-200 is an optical time domain reflectometer used to test fiber optic cables.

Model	Serial Number
UOR-200	N/A

EUT Power Requirements
USB powered

EUT Internal Board(s)					
Description	Clock Freq.(s)	P/N	S/N	Rev.	Slot #
	33MHz, 66MHz, 100MHz				

Modifications made to Equipment Required for Compliance

No modifications were necessary.

Performance Criteria:

Criteria A: Laptop display shows fiber measurement data.

Criteria B: Laptop stops displaying fiber measurement information. EUT reboots on its own and laptop displays readings again.

Criteria C: EUT hangs and displays an error message on the laptop. The EUT will not reboot and requires a manual reboot.

Criteria D: EUT hangs up. The EUT will not continue to function after a manual reboot. The EUT is broken.



3.0 TEST DESCRIPTION

The EUT was connected as shown in Section 8.0 of this report. All testing and verification for EUT operation was monitored utilizing the application software. The customer was not present during testing.

The EUT set up was placed in an RF ferrite tile shielded room in accordance with the EN61000-4-3 standard, with the following environmental conditions:

Temperature: 21 degrees C
Relative Humidity: 44 %

The EUT was placed on a non-conductive table, 0.8 meters above the ground plane. The power input lines and I/O cables were placed on the non-conductive table for a distance of 1 meter, before dropping to the ground plane. The RF Radiated immunity test was performed with the radiating source antenna directed toward each of the 4 orthogonal axis to the EUT. Testing was performed with the radiating antenna oriented both horizontally and vertically. The functionality of the EUT was then monitored. See Section 8 for photographs of typical antenna set-ups.

The Radiated Field test parameters for EN61000-4-3:

- Frequency range: 80 MHz to 1.0 GHz
- Field Strength: 3v/m
- Modulation: 80% amplitude modulated 1 KHz sine wave
- Frequency sweep rate: not to exceed 1.5 x 0.001 decades per second

NOTE: See Section 7, Figure 1 for typical RF wave shapes.

Test Level (Severity Level): Severity Level 2 was applied for this particular product, the Advanced Fiber Solutions UOR-200 which means the field strength is set to 3v/m for EN61000-4-3.

Deviations: There were no deviations to the test procedure.

Mode of EUT Operation: EUT was measuring fiber during testing.

4.0 TEST RESULTS

The Advanced Fiber Solutions UOR-200 met the requirements of EN61326 using the test methods described in EN 61000-4-3 (1998).

5.0 TEST DATA

The following testing was performed on all 4 sides of the EUT, the Advanced Fiber Solutions UOR-200.

Parameters:

Severity Level: 2 (3 Volts/meter & 80% AM Modulation @ 1 KHz)
 Frequency Steps: 1 % increments of previous frequency
 80-1000 MHz
 Dwell Time: 2s
 Amplitude: 100mv

Results:

Biconilog 80-1000 MHz

Orientation	MHz Frequency	Field	Modulation	Observed Effect
Vertical	80-1000	3 v/m	1 KHz, 80%	No change in performance
Horizontal	80-1000	3 v/m	1 KHz, 80%	No change in performance

	Horizontal	Vertical		Horizontal	Vertical
Front	A	A	Left	A	A
Back	A	A	Right	A	A

Results Key:

Performance Criterion A: Normal performance within the specification limits without operator intervention
 Performance Criterion B: Temporary degradation, or loss of function or performance, which is self-recovering.
 Performance Criterion C: Temporary degradation, or loss of function or performance, which requires intervention or system reset to occur.
 Performance Criterion D: Degradation or loss of function, which is not recoverable due to damage to equipment, components, software, or loss of data



6.0 TEST EQUIPMENT for EN 61000-4-3 (1998)

	Equipment	Serial #	Most Recent Calibration Date	Calibration Due Date
X	Panashield Ferrite Tile Anechoic Chamber		09/23/05	09/23/06
X	EMCO 3146	9203-3362	not req'd	not req'd
X	EMCO 3109	9304-2715	not req'd	not req'd
X	HP 8648C Signal Generator	3642U01959	02/27/04	02/27/06
X	Amplifier Research 100W-1000MIA-RF Amp	19994	not req'd	not req'd
	Amplifier Research FM5004 - Field Monitor	308989	not req'd	not req'd
X	Amplifier Research FM1000 - Field Monitor	12022	not req'd	not req'd
	Amplifier Research FP2000 - Field Sensor	16760	11/11/03	11/11/04
X	Amplifier Research FP2000 - Field Sensor	28150	12/14/04	12/14/06

	MISC.TEST EQUIPMENT	Serial #	Most Recent Calibration Date	Calibration Due Date
	Dickson TH603 Temp/Humidity Recorder	9197458	02/18/04	02/18/05
X	Dickson TH603 Temp/Humidity Recorder	9197457	02/14/05	02/14/07
	Fluke 79 Series II Multimeter	67700905	01/15/04	01/15/05
	FCC F-201-32mm Absorbing Clamp	363	N/A	N/A
	Omega Temp/Humd Recorder	CT485B-704013039W1	02/12/05	02/12/06

X Indicates equipment used for this testing

All equipment used for testing has been calibrated according to methods and procedures defined by the National Institute of Standards and Technology (NIST).

7.0 FIGURES

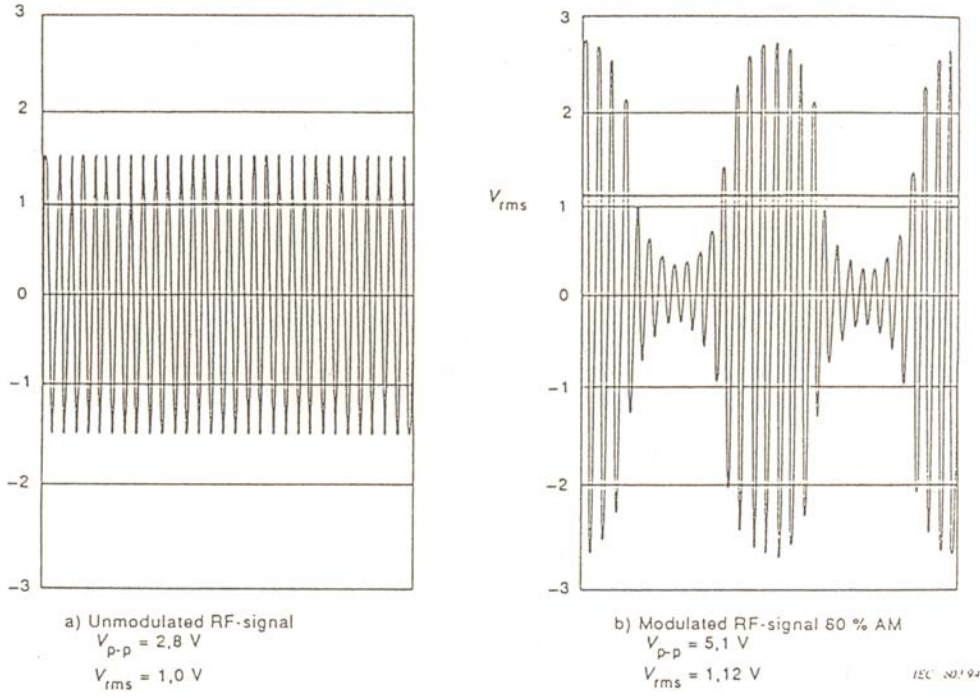


Figure 1 – Definition of the test level and the waveshapes occurring at the output of the signal generator (test level 1)



8.0 PHOTOGRAPHS

